

# WORK LIGHTS OF THE FUTURE

PREISLISTE | 2023  
LISTE DE PRIX

ORIGINAL  
SCANGRIP




SINCE 1906



AVI



UNIWHEEL

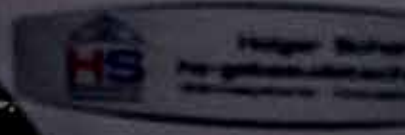

# Pricelist

---

## General WORK LIGHTS



WORK LIGHTS

04



CONNECT

14



LITE

20

## SPECIALIZED work lights



COLOUR MATCH

24



EX PROOF

26



UV-CURING

28



ACCESSORIES

30

MAG series



	MAG PEN 3	MINI MAG PRO	MAG	MAG PRO
Product number	03.5116	03.5692	03.5400	03.5690
Light source	COB LED Spot: CREE XP-G2	COB LED Spot: High power LED	10 SMD LEDs Spot: High power LED	COB LED Spot: High power LED
LED performance, lumen/W	180	165	118	185
Luminous flux, lumen	15-150 Spot: 80	20-200 Spot: 80	150-300 Spot: 80	60-600 Spot: 150
Illuminance, lux@0.5 m	200 Spot: 2000	35-350 Spot: 700	250-500 Spot: 850	90-900 Spot: 2000
Adjustable light output	Stepless	Stepless	2 levels	Stepless
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	2.5	1.5
Operating time with min. lumen, h	20	20	5	15
Charging time, h	3.5	3	4	4
Battery	3.7 V / 750 mAh Li-ion	3.7 V / 1200 mAh Li-ion	3.7 V / 2200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP20	IP54	IP20	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 2.5 W	Max 3.5 W	Max 6.5 W
Charger incl.	No	No	Country depended	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	174 x 31 x 21 mm	200 x 40 x 28 mm	260 x 61 x 43 mm	261 x 62 x 43 mm
Net weight	78 g	157 g	252 g	339 g
Price	<b>CHF 44,00</b>	<b>CHF 50,00</b>	<b>CHF 61,00</b>	<b>CHF 75,00</b>

UNIFORM series



	UNIPEN	MINIFORM	UNIFORM	SUPERFORM	UV-FORM
Product number	03.5420	03.5404	03.5407	03.5406CH.A	03.5408
Light source	COB LED Spot: High power LED	COB LED Spot: High power LED	COB LED Spot: High power LED	COB LED	COB LED Spot: High power UV-light
LED performance, lumen/W	125	165	150	130	128
Luminous flux, lumen	75-150 Spot: 75	100-200 Spot: 120	250-500 Spot: 175	750	125-250 Spot: UV
Illuminance, lux@0.5 m	125-250 Spot: 900	100-200 Spot: 800	475-950 Spot: 6000	1000	200-400 Spot: UV
Adjustable light output	2 levels	2 levels	2 levels	No	2 levels
Beam angle	-	110°	-	-	-
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	3	2	-	2.5
Operating time with min. lumen, h	4	6	4.5	-	5
Charging time, h	2.5	3	5	-	3
Battery	3.7 V / 750 mAh Li-ion	3.7 V / 1600 mAh Li-ion	3.6 V / 3000 mAh Li-ion	-	3.7 V / 1600 mAh Li-ion
Protection class	IP65	IP65	IP65	IP54	IP20
Impact protection	IK07	IK07	IK07	IK08	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	5 m HO5RN-F 2x1 mm <sup>2</sup>	1 m USB
Operating voltage AC	-	-	-	100-240 V	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	-	5 V / 1 A
Power consumption	Max 1.5 W	Max 2.5 W	Max 6 W	Max 8 W	Max 3 W
Charger incl.	No	Country depended	Country depended	-	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	155 x 27 x 21 mm	122 x 60 x 28 mm	190 x 60 x 32 mm	270 x 49 x 31 mm	155 x 60 x 32 mm
Net weight	80 g	130 g	263 g	710 g	156 g
Price	<b>CHF 53,00</b>	<b>CHF 66,00</b>	<b>CHF 104,00</b>	<b>CHF 72,00</b>	<b>CHF 87,00</b>

SLIM series



	MINI SLIM	SLIM
Product number	03.5610	03.5612
Light source	COB LED Spot: High power LED	COB LED Spot: High power LED
LED performance, lumen/W	170	155
Luminous flux, lumen	100-200 spot: 100	250-500 spot: 100
Illuminance, lux@0.5 m	150-400 spot: 5200	400-800 spot: 4800
Adjustable light output	2 levels	2 levels
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	2.5	2.5
Operating time with min. lumen, h	5	5
Charging time, h	3	4.5
Battery	3.7 V/1200 mAh Li-ion	3.6 V/3000 mAh Li-ion
Protection class	IP30	IP30
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 2 W	Max 4 W
Charger incl.	Country depended	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	132 x 41 x 30 mm	165 x 44 x 28 mm
Net weight	101 g	224 g
Price	<b>CHF 73,00</b>	<b>CHF 90,00</b>

	STAR
Product number	03.5620
Light source	COB LED
LED performance, lumen/W	140
Luminous flux, lumen	500-1000
Illuminance, lux@0.5 m	800-1600
Adjustable light output	2 levels
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	2.5
Operating time with min. lumen, h	5
Charging time, h	8
Battery	3.7 V/5200 mAh Li-ion
Protection class	IP65
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 8.5 W
Charger incl.	Country depended
Temperature	-10 to +40 °C
Dimensions	156 x 103 x 98 mm
Net weight	620 g
Price	<b>CHF 115,00</b>

LINE LIGHT inspection



	LINE LIGHT C+R	LINE LIGHT R
Product number	03.5243	03.5244
Light source	36 SMD LED Spot: CREE XP-G2	20 SMD LED Spot: CREE XP-G2
LED performance, lumen/W	189	189
Luminous flux, lumen	900 Spot: 150	600 Spot: 150
Illuminance, lux@0.5 m	1800 Spot: 1500	1200 Spot: 1500
Adjustable light output	No	No
Beam angle	75° Spot: 50°	75° Spot: 50°
CRI	Ra > 80	Ra > 80
CCT	6500 K	6500 K
Operating time with max. lumen, h	2.5 Spot: 8	1.5 Spot: 4
Operating time with min. lumen, h	-	-
Charging time, h	4	6
Battery	3.7 V / 5200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	5 m / 2 x 1 mm² H05RN-F	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 1 A
Power consumption	Max 8 W	Max 5.5 W
Charger incl.	Yes	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 461 mm	ø25 x 357 mm
Net weight	300 g	220 g
Price	<b>CHF 121,00</b>	<b>CHF 107,00</b>

BONNET LIGHTS




	LINE LIGHT BONNET C+R	NOVA BONNET
Product number	03.5240	03.5457
Light source	64 SMD LED	High efficiency COB LED
LED performance, lumen/W	189	160
Luminous flux, lumen	700-1400	200-2000
Illuminance, lux@0.5 m	1000-2000	300-3000
Adjustable light output	2 levels	5 levels
Beam angle	75°	-
CRI	Ra > 80	Ra > 80
CCT	6500 K	6000 K
Operating time with max. lumen, h	1.5	2
Operating time with min. lumen, h	3	20
Charging time, h	4	5
Battery	3.7 V / 5200 mAh Li-ion	7.3 V / 4000 mAh Li-ion
Protection class	IP65	IP67
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	5 m / 2 x 1.0 mm² H05RN-F	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 2 A
Power consumption	Max 13 W	Max 16 W
Charger incl.	Yes	Yes
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 1017 mm	1135 x 220 x 163 mm
Net weight	470 g (980 g incl. rack)	1.69 kg (NOVA R 790 g)
Price	<b>CHF 196,00</b>	<b>CHF 173,00</b>

## Headlamps



	ZONE 2	ZOOM	NIGHT VIEW
Product number	03.5850	03.5627	03.5438
Light source	COB LED	LED	Ultra high CRI + COB LED
LED performance, lumen/W	155	120	100
Luminous flux, lumen	20/100/200 (Step 1/2/3)	10/80/220 (Step 1/2/3)	80-160
Illuminance, lux@0.5 m	40-400	55-1200	250-500
Adjustable light output	3 levels	3 levels	2 levels
Beam angle	120° / 60°	10° / 60°	120° / 60°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K RED 632 nm
Operating time with max. lumen, h	2	4.5	2.5
Operating time with min. lumen, h	22	19	5
Charging time, h	2.5	2.5	4
Battery	3.7 V / 1200 mAh Li-ion	3.7 V / 2000 mAh Li-ion	3.8 V / 1600 mAh Li-ion
Protection class	IP54	IP54	IP65
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 5.5 W	Max 3 W
Charger incl.	No	No	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	84 x 31 x 37 mm	78 x 46.4 x 46.6 mm	105 x 52 x 43 mm
Net weight	75 g	109 g	130 g
Price	<b>CHF 46,00</b>	<b>CHF 35,00</b>	<b>CHF 92,00</b>



Optional accessory for 03.5626 I-VIEW

	I-VIEW	POWERBANK
Product number	03.5626	03.5782
Light source	COB LED	-
LED performance, lumen/W	175	-
Luminous flux, lumen	40-400	-
Illuminance, lux@0.5 m	100-1000	-
Adjustable light output	Stepless	-
Beam angle	120° / 60°	-
CRI	Ra > 80	-
CCT	6000 K	-
Operating time with max. lumen, h	1.5	-
Operating time with min. lumen, h	15	-
Charging time, h	3.5	3
Battery	3.8 V / 1600 mAh Li-ion	3.65 V / 4000 mAh
Protection class	IP65	IP20
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	Spiral cable
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 2 A
Power consumption	Max 3.25 W	Max 8 W
Charger incl.	No	-
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	100 x 50 x 38 mm	ø28 x 103 mm
Net weight	100 g	132 g
Price	<b>CHF 83,00</b>	<b>CHF 31,00</b>

SEE MORES ABOUT SCANGRIP HEADLAMPS

ACCESSORIES	Product number	Price
<p>HARD HAT BRACKET For 03.5626 I-VIEW 103 x 33,5 x 28 mm 22 g</p>	03.5797	<b>CHF 18,00</b>
<p>ADHESIVE MOUNTING BASES For 03.5797 HARD HAT BRACKET</p>	03.5798	<b>CHF 10,00</b>

## Lighting to wear



FLEX WEAR	
Product number	03.5810
Light source	COB LED / LED
LED performance, lumen/W	160
Luminous flux, lumen	75/150 (Step 1/2) Spot: 100
Illuminance, lux@0.5 m	110/210 Spot: 2200
Adjustable light output	2 levels
Beam angle	110° / 14°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	2
Operating time with min. lumen, h	4
Charging time, h	2.5
Battery	3.7 V/800 mAh Li-ion
Protection class	IP20
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 1.5 W
Charger incl.	No
Temperature	-10 to +40°C
Dimensions	89 x 26 x 21 mm
Net weight	42 g
Price	<b>CHF 35,00</b>

## FLEX WEAR KIT

	Product number	Price
 <p>FLEX WEAR KIT : FLEXWEAR including headband and cap mount</p>	03.5811	<b>CHF 46,00</b>



NOVA rechargeable series



	NOVA MINI	NOVA R	NOVA 4K C+R	NOVA 6K C+R
Product number	03.6010	03.5456	03.5441	03.5443
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	155	160	170	160
Luminous flux, lumen	100-1000	200-2000	400-4000	600-6000
Illuminance, lux@0.5 m	150-1500	300-3000	500-5000	800-8000
Adjustable light output	Stepless	5 levels	5 levels	5 levels
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1.5	2	1	1
Operating time with min. lumen, h	15	20	14	12
Charging time, h	5	5	2	2
Battery	3.65 V / 4000 mAh	7.3 V / 4000 mAh Li-ion	11.1 V / 4400 mAh Li-ion	11.1 V / 5200 mAh Li-ion
Protection class	IP65	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 2 A	12.6 V / 2.4 A	12.6 V / 4.3 A
Power consumption	Max 10 W	Max 16 W	Max 29 W	Max 42 W
Charger incl.	No	Yes	Yes	Yes
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	104 x 38 x 96 mm	163 x 63 x 163 mm	235 x 88 x 233 mm	267 x 87 x 262 mm
Net weight	254 g	790 g	2.3 kg	2.91 kg
Price	<b>CHF 89,00</b>	<b>CHF 121,00</b>	<b>CHF 210,00</b>	<b>CHF 250,00</b>

NOVA cable series



	NOVA 4K	NOVA 6K	NOVA 12K
Product number	03.5440	03.5442	03.5444
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	160	160	170
Luminous flux, lumen	400-4000	600-6000	1200-12000
Illuminance, lux@0.5 m	600-6000	900-9000	1800-18000
Adjustable light output	5 levels	5 levels	5 levels
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-
Operating time with min. lumen, h	-	-	-
Battery	-	-	-
Protection class	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	5 m / 3 x 1 mm <sup>2</sup> H05RN-F	5 m / 3 x 1 mm <sup>2</sup> H05RN-F	5 m / 3 x 1 mm <sup>2</sup> H05RN-F
Operating voltage AC	100-240 V	100-240 V	100-240 V
Charging voltage/current DC	-	-	-
Power consumption	Max 30 W	Max 42 W	Max 86 W
Charger incl.	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	235 x 88 x 233 mm	267 x 87 x 262 mm	302 x 102 x 298 mm
Net weight	2.38 kg	2.66 kg	4 kg
Price	<b>CHF 135,00</b>	<b>CHF 155,00</b>	<b>CHF 280,00</b>





SITE LIGHT series



	SITE LIGHT 40	SITE LIGHT 80
Product number	03.5268	03.5269
Light source	432 SMD LEDs	864 SMD LEDs
LED performance, lumen/W	189	189
Luminous flux, lumen	10000-40000	20000-80000
Illuminance, lux@0.5 m	-	-
Adjustable light output	4 levels	4 levels
Beam angle	120°	120°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	-	-
Operating time with min. lumen, h	-	-
Charging time, h	-	-
Battery	-	-
Protection class	IP65	IP65
Impact protection	IK08	IK08
Impact resistance	1 m	1 m
Cable	10 m / 3 x 1 mm <sup>2</sup> H07RN-F	10 m / 3 x 1 mm <sup>2</sup> H07RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	Max 315 W	Max 630 W
Charger incl.	-	-
Temperature	-25 to +40 °C	-25 to +40 °C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	<b>CHF 736,00</b>	<b>CHF 1.231,00</b>



ACCESSORIES		Product number	Price
	SCANGRIP TRIPOD 4.5m Air cushioned tripod for positioning of SITE LIGHTs, 2.2 - 4.5 m	03.5270	<b>CHF 311,00</b>
	DUAL BRACKET for 4.5m TRIPOD For positioning of two SITE LIGHTs	03.5758	<b>CHF 62,00</b>
	TRANSPORT CASE SITE LIGHT 80	49.0351	<b>CHF 198,00</b>
	TRANSPORT CASE SITE LIGHT 40	49.0350	<b>CHF 112,00</b>
The transport cases enable you to safely transport your SITE LIGHT work light to the building site. They are sturdy and high-quality cases that can withstand shocks and rough handling during transport.			

Go to [scangrip.com](http://scangrip.com) to see other accessories available

## FLASH series



	FLASH PENCIL	FLASH PEN	FLASH 300	FLASH 600	FLASH MICRO R
Product number	03.5130	03.5131	03.5132	03.5133	03.5113
Light source	LUMILEDS	CREE	CREE	CREE	LED
LED performance, lumen/W	124	142	165	165	103
Luminous flux, lumen	75	100-200	150-300	300-600	7.5-75
Illuminance, lux@0.5 m	1500	500-8000	600-10000	1000-20000	2.5
Adjustable light output	No	BOOST mode	BOOST mode	BOOST mode	Stepless
Beam angle	15°	10°-60°	10°-60°	10°-60°	110°
Beam distance	40 m	80 m	100 m	150 m	10 m
CRI	Ra > 70	Ra > 70	Ra > 65	Ra > 65	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2.5	3.5	3	2	0.25
Operating time with min. lumen, h	-	-	-	-	2.5
Charging time, h	-	-	-	-	2.5
Battery	2 x AAAA / 1.5 V Alkaline	2 x AAA / 1.5 V Alkaline	3 x AAA / 1.5 V Alkaline	2 x C / 1.5 V Alkaline	3.7 V / 100 mAh Li-ion
Protection class	IP54	IP54	IP54	IP54	IP20
Impact protection	IK07	IK07	IK07	IK07	-
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	-	-	-	-	USB cable
Charging voltage/current DC	-	-	-	-	-
Power consumption	Max 1.6 W	Max 1.2 W	Max 4.8 W	Max 7 W	Max 1.2 W
Charger incl.	-	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø15 x 131 mm	ø20 x 153 mm	ø32 x 133 mm	ø36 x 174 mm	55 x 15 x 25 mm
Net weight	32 g	62 g	122 g	292 g	17 g
Price	<b>CHF 23,00</b>	<b>CHF 33,00</b>	<b>CHF 41,00</b>	<b>CHF 52,00</b>	<b>CHF 18,00</b>

## FLASH R series



	FLASH 12-24V	WORK PEN 200 R	FLASH PEN R	FLASH 600 R	FLASH 1000 R
Product number	03.5124	03.5127	03.5136	03.5137	03.5138
Light source	SAMSUNG LED	COB LED / CREE	CREE	CREE	CREE
LED performance, lumen/W	140	120	165	165	148
Luminous flux, lumen	130	20-200 Spot: 150	150-300	300-600	500-1000
Illuminance, lux@0.5 m	900-8000	400 Spot: 3500	600-10000	1000-20000	3000-60000
Adjustable light output	No	Stepless	BOOST mode	BOOST mode	BOOST mode
Beam angle	10°-70°	105° / 20°	10°-60°	10°-70°	10°-60°
Beam distance	100 m	40 m	100 m	150 m	250 m
CRI	Ra > 70	Ra > 80	Ra > 65	Ra > 65	Ra > 70
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1	1	7	7	5
Operating time with min. lumen, h	-	10	-	-	-
Charging time, h	2	2.5	3	4	4
Battery	3.7 V / 550 mAh Li-ion	3.7 V / 750 mAh Li-ion	3.7 V / 1100 mAh Li-ion	3.7 V / 2600 mAh Li-ion	3.7 V / 4000 mAh Li-ion
Protection class	IP30	IP30	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	Cigarette Plug Connector	1 m USB	1 m USB	1 m USB	1 m USB
Charging voltage/current DC	10-28 V	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 2 A
Power consumption	Max 2 W	4 W	4 W	6 W	12 W
Charger incl.	No	No	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø30 x 105 mm	ø21 x 172 mm	ø24 x 169 mm	ø38 x 185 mm	ø42 x 196 mm
Net weight	88 g (100 g with cover)	54 g	83 g	253 g	345 g
Price	<b>CHF 35,00</b>	<b>CHF 35,00</b>	<b>CHF 46,00</b>	<b>CHF 58,00</b>	<b>CHF 81,00</b>

## LINE LIGHT series



	LINE LIGHT 2-POST	LINE LIGHT 1	LINE LIGHT 2	LINE LIGHT 4	LINE LIGHT 6
Product number	03.5225	03.5203	03.5202	03.5201	03.5200
Light source	2 x 96 SMD LED	216 SMD LED	2 x 156 SMD LED	4 x 216 SMD LED	6 x 216 SMD LED
LED performance, lumen/W	189	189	189	189	189
Luminous flux, lumen	2 x 12.5-1250	2750	2 x 2000	4 x 2750	6 x 2750
Illuminance, lux@0.5 m	2 x 20-2000	3000	2 x 2800	4 x 27.5-2750	6 x 3000
Adjustable light output	Stepless	No	No	Stepless	No
Beam angle	75°	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-	-
Operating time with min. lumen, h	-	-	-	-	-
Charging time, h	-	-	-	-	-
Battery	-	-	-	-	-
Protection class	IP67	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	8 m / H03VV-F 2 x 0.5 mm <sup>2</sup>	8 m / H03VV-F 2 x 0.5 mm <sup>2</sup>	8 m / H03VV-F 2 x 0.5 mm <sup>2</sup>	8 m / H03VV-F 2 x 0.5 mm <sup>2</sup>	8 m / H03VV-F 2 x 0.5 mm <sup>2</sup>
Operating voltage AC	-	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V	24 V
Power consumption	Max 2 x 24 W	Max 26 W	Max 2 x 38 W	Max 4 x 104 W	Max 6 x 156 W
Power supply incl.	25 W POWER SUPPLY UNIT 03.5229	25 W POWER SUPPLY UNIT 03.5229	80 W POWER SUPPLY UNIT 03.5226	80 W POWER SUPPLY UNIT 03.5226	2 x 80 W POWER SUPPLY UNIT 03.5226
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	2 x ø25 x 770 mm	ø25 x 1630 mm	2 x ø25 x 1234 mm	4 x ø25 x 1630 mm	6 x ø25 x 1630 mm
Net weight*	4.1 kg	2.03 kg	4.52 kg	6.7 kg	10.24 kg
Price	<b>CHF 465,00</b>	<b>CHF 279,00</b>	<b>CHF 453,00</b>	<b>CHF 1.162,00</b>	<b>CHF 1.743,00</b>

\*Weight includes all parts and accessories included





## LINE LIGHT series



	LINE LIGHT 75	LINE LIGHT 120	LINE LIGHT 160	LINE LIGHT 200
Product number	03.5221	03.5222	03.5223	03.5224
Light source	96 SMD LED	156 SMD LED	216 SMD LED	276 SMD LED
LED performance, lumen/W	189	189	189	189
Luminous flux, lumen	1250	2000	2750	3500
Illuminance, lux@0.5 m	2000	2800	3000	3200
Adjustable light output	No	No	No	No
Beam angle	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-
Operating time with min. lumen, h	-	-	-	-
Charging time, h	-	-	-	-
Battery	-	-	-	-
Protection class	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	-	-	-	-
Operating voltage AC	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V
Power consumption	Max 10 W	Max 16 W	Max 22 W	Max 28 W
Power supply incl.	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 838 mm	ø25 x 1234 mm	ø25 x 1630 mm	ø25 x 2027 mm
Net weight*	390 g	530 g	670 g	860 g
Price	<b>CHF 140,00</b>	<b>CHF 233,00</b>	<b>CHF 267,00</b>	<b>CHF 314,00</b>

## LINE LIGHT accessories

Combine LINE LIGHT lighting units with power supply, cable and suitable suspensions. A range of flexible suspensions makes it possible to position the lighting units exactly where you need it.

POWER SUPPLY/CABLE		Product number	Price
	LINE LIGHT DIMMER	03.5264	<b>CHF 82,00</b>
2 m cable  5 m cable	25 W power supply unit	03.5229	<b>CHF 37,00</b>
2 m cable  5 m cable	80 W power supply unit	03.5226	<b>CHF 60,00</b>
	POWER CABLE 8 m	03.5215	<b>CHF 10,00</b>

SUSPENSIONS		Product number	Price
	CLIP - 1 pc. - incl. fittings for suspension	03.5214	<b>CHF 8,00</b>
	CLIP - 1 pc. - incl. fittings for suspension	03.5216	<b>CHF 28,00</b>
	CLIP with ø30 mm magnet for suspension	03.5279	<b>CHF 25,00</b>
	LARGE MAGNET - ø60 mm with clip	03.5276	<b>CHF 31,00</b>
	FLEXIBLE MAGNET SUSPENSION - Ball socket joint with strong magnet for suspension for LINE LIGHT 2-POST	03.5257	<b>CHF 50,00</b>
	MAGNET - With small clip - ø30 mm	03.5246	<b>CHF 19,00</b>
	CLIP - Small metal clip	03.5213	<b>CHF 5,00</b>
	GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm suction cup	03.5219	<b>CHF 31,00</b>
	GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm magnet	03.5218	<b>CHF 37,00</b>
	HOOK - Adjustable hook with clip holder and magnet	03.5312	<b>CHF 14,00</b>

Go to [scangrip.com](http://scangrip.com) to see other accessories available



One lighting solution for all battery packs

# JUST CONNECT

Compatible with AMPSHARE - BERNER - BOSCH - BOSCH GREEN - DEWALT - EINHELL - FEIN - FESTOOL

FLEX - HAZET - HIKOKI - INGERSOLL - MAKITA - METABO - MILWAUKEE - PANASONIC - RIDGID - SNAP-ON - WÜRTH



## NOVA CONNECT series



	NOVA 2 CONNECT	NOVA 4 CONNECT	NOVA 10 CONNECT
Product number	03.6100C	03.6101C	03.6102C
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	165	160	165
Luminous flux, lumen	200-2000	400-4000	1000-10000
Illuminance, lux@0.5 m	300-3000	600-6000	1600-16000
Adjustable light output	5 levels	5 levels	5 levels
Beam angle	100°	110°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	5.75@18 V 5.2 Ah battery	3@18 V 5.2 Ah battery	1.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	58@18 V 5.2 Ah battery	31@18 V 5.2 Ah battery	12@18 V 5.2 Ah battery
Operating time: backup battery, h	-	2.5@10% / 400 lm	1@10% / 1000 lm
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP65 IP54 with battery cover	IP65 IP54 with battery cover
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 16 W	Max 30 W	Max 75 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	161 x 164 x 78 mm	263 x 230 x 119 mm	304 x 292 x 131 mm
Net weight	720 g	2.36 kg	3.72 kg
Price	<b>CHF 114,00</b>	<b>CHF 216,00</b>	<b>CHF 348,00</b>

## VEGA CONNECT series



	VEGA 2 CONNECT	VEGA 4 CONNECT
Product number	03.6106C	03.6104C
Light source	60 LEDs	105 LEDs
LED performance, lumen/W	189	189
Luminous flux, lumen	1000 / 2000 (step 1 / 2)	2000 / 4000 (step 1 / 2)
Illuminance, lux@0.5 m	1500 / 3000 (step 1 / 2)	3000 / 6000 (step 1 / 2)
Adjustable light output	2 levels	2 levels
Beam angle	100°	100°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery	2.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	9@18 V 5.2 Ah battery	4.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP54 with power supply IP30 with battery	IP54 with power supply IP30 with battery
Impact protection	IK06	IK07
Impact resistance	1 m	1 m
Charger input voltage	-	-
Power consumption	Max 20W	Max 40 W
Battery incl.	No	No
Charger incl.	No	No
Power supply incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	200 x 208 x 78 mm	280 x 289 x 103 mm
Net weight	850 g	2.02 kg
Price	<b>CHF 96,00</b>	<b>CHF 156,00</b>

Use your 18 V/20 V battery pack for SCANGRIP CONNECT work lights

### JUST CONNECT

Add the connector matching your 18 V/20 V battery pack



## AREA CONNECT series



	AREA 10 CONNECT	AREA 6 CONNECT
Product number	03.6103C	03.6108C
Light source	240 LEDs	160 LEDs
LED performance, lumen/W	189	189
Luminous flux, lumen	360°: 1000-10000 / 180°: 500-5000	3000 / 6000 (step 1 / 2)
Illuminance, lux@0.5 m	300-3000	1500 / 3000 (step 1 / 2)
Adjustable light output	5 levels	2 levels
Beam angle	360° / 180°	360°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	1@18 V 5.2 Ah battery	1.75@18 V 5.2 Ah battery
Operating time with min. lumen, h	22@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time: backup battery, h	50min@10 % / 1000 lm	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP65 IP54 with battery cover	IP54 with power supply IP30 with battery
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Charger input voltage	-	-
Power consumption	Max 84 W	Max 54 W
Battery incl.	No	No
Charger incl.	No	No
Power supply incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	395 x 200 x 212 mm	ø195 x 363 mm
Net weight	3.7 kg	1.97 kg
Price	<b>CHF 348,00</b>	<b>CHF 216,00</b>

	BASIC CONNECT
Product number	03.6109C
Light source	30 LEDs
LED performance, lumen/W	189
Luminous flux, lumen	500 / 1000 (step 1 / 2)
Illuminance, lux@0.5 m	650 / 1300 (step 1 / 2)
Adjustable light output	2 levels
Beam angle	110°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	9@18 V 5.2 Ah battery
Operating time with min. lumen, h	18@18 V 5.2 Ah battery
Operating time: backup battery, h	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30
Impact protection	IK07
Impact resistance	1 m
Charger input voltage	-
Power consumption	Max 10.5 W
Battery incl.	No
Charger incl.	No
Power supply incl.	No
Temperature	-10 to +40 °C
Dimensions	158 x 79 x 62 mm
Net weight	340 g
Price	<b>CHF 72,00</b>

# MULTILIGHT CONNECT series



	MULTILIGHT SEARCH CONNECT	MULTILIGHT FLEX CONNECT	MULTILIGHT FLOOD CONNECT
Product number	03.5695C	03.5693C	03.5694C
Light source	High power LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	143	160	153
Luminous flux, lumen	300-600	375-750	750-1500
Illuminance, lux@0.5 m	2200-26000	600-1200	1200-2400
Adjustable light output	2 levels	2 levels	2 levels
Beam angle	10° - 70°	110°	110°
CRI	Ra > 70	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18 V 5.2 Ah battery
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 8 W	Max 7.5 W	Max 14.5 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Max Load	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	186 x 79 x 203 mm	168 x 79 x 203 mm	145 x 116 x 197 mm
Net weight	466 g	376 g	611 g
Price	<b>CHF 108,00</b>	<b>CHF 108,00</b>	<b>CHF 114,00</b>



	MULTILIGHT BODY CONNECT	SEARCH HEAD CONNECT	FLEX HEAD CONNECT	FLOOD HEAD CONNECT
Product number	03.5696C	03.5699C	03.5697C	03.5698C
Light source	-	High power LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	-	143	160	153
Luminous flux, lumen	-	300-600	375-750	750-1500
Illuminance, lux@0.5 m	1100-13000	2200-26000	600-1200	1200-2400
Adjustable light output	2 levels	2 levels	2 levels	2 levels
Beam angle	-	10° - 70°	110°	110°
CRI	-	Ra > 70	Ra > 80	Ra > 80
CCT	-	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	-	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Charger input voltage	-	-	-	-
Power consumption	-	Max 8 W	Max 7.5 W	Max 14.5 W
Battery incl.	No	No	No	No
Charger incl.	No	No	No	No
Power supply Incl.	No	No	No	No
Max load	90 W	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	114 x 202 x 78 mm	92 x 49 x 49 mm	244 x 41 x 41 mm	57 x 116 x 106 mm
Net weight	271 g	195 g	105 g	340 g
Price	<b>CHF 66,00</b>	<b>CHF 54,00</b>	<b>CHF 54,00</b>	<b>CHF 60,00</b>



## MULTILIGHT CONNECT

New flexible concept of hand-held work light with multiple, exchangeable light heads



## DUO / TOWER CONNECT



	DUO CONNECT	TOWER COMPACT CONNECT	TOWER 5 CONNECT
Product number	03.6111C	03.6110C	03.6105C
Light source	2 x 40 LEDs	2 x 40 LEDs	120 LEDs
LED performance, lumen/W	189	189	189
Luminous flux, lumen	1250 / 2500 (step 1 / 2)	1250 / 2500 (step 1 / 2)	2500 / 5000 (step 1 / 2)
Illuminance, lux@0.5 m	900 / 1800 (step 1 / 2)	900 / 1800 (step 1 / 2)	4000 / 8000 (step 1 / 2)
Adjustable light output	2 levels	2 levels	2 levels
Beam angle	180°	180°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery	4.5@18V 5.2 Ah battery	2@18 V 5.2 Ah battery
Operating time with min. lumen, h	9.5@18V 5.2 Ah battery	9.5@18V 5.2 Ah battery	4.5@18V 5.2 Ah battery
Operating time: backup battery, h	-	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR		Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 19.5 W	Max 19.5 W	Max 45 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply incl.	No	No	No
Temperature	-10 to +40 °C	-10° to +40°C	-10 to +40 °C
Dimensions	224 x 78 x 91 mm	956 x 78 x 91mm	121 x 153 x 892 mm
Net weight	620 g	2.74 kg (incl. stand)	5.2 kg
Price	<b>CHF 96,00</b>	<b>CHF 204,00</b>	<b>CHF 294,00</b>

## CONNECTORS

SCANGRIP CONNECTORs for 18 V/20 V battery packs		Price
BERNER	03.6155C	CHF 12,00
BOSCH / AMPSHARE	03.6140C	CHF 12,00
BOSCH GREEN	03.6141C	CHF 12,00
DEWALT	03.6142C	CHF 12,00
EINHELL	03.6143C	CHF 12,00
FEIN	03.6144C	CHF 12,00
FESTOOL	03.6153C	CHF 12,00
FLEX	03.6145C	CHF 12,00
HAZET	03.6146C	CHF 12,00
HIKOKI	03.6147C	CHF 12,00
INGERSOLL	03.6152C	CHF 12,00
MAKITA	03.6148C	CHF 12,00
MILWAUKEE	03.6149C	CHF 12,00
PANASONIC	03.6156C	CHF 12,00
RIDGID	03.6154C	CHF 12,00
SNAP-ON	03.6151C	CHF 12,00
WÜRTH	03.6150C	CHF 12,00



## BATTERY SAFETY SYSTEM

- Automatic discharge protection
- Overload protection
- Temperature surveillance
- Approved by TÜV Rheinland



Scan QR code to see TÜV Rheinland test report

## Accessories



	CONNECT POWER SUPPLY	CAS BATTERY 18V Li-POWER 5.2Ah	CAS CHARGER SC30
Product number	03.6123C	03.6121	03.6122
Battery	-	18 V 5.2 Ah Li-power	-
Cable	5m / 2 x 0.75 mm <sup>2</sup> H05RN-F	-	1.35 m / 2 x 0.75mm <sup>2</sup> H03V VH2-F
Charger input voltage	100-240V AC 50/60 Hz	-	220-240V AC 50/60 Hz
Max load	Max 90 W	-	Max 30 W
Charging time, h	-	208 min @100 % with CAS charger 03.6122	-
Protection class	IP65	IP20	IP20
Impact protection	IK07	-	-
Impact resistance	1 m	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	124 x 83 x 72 mm	121 x 81 x 66 mm	152 x 142 x 76 mm
Net weight	1 kg	670 g	440 g
Compatibility	SCANGRIP CONNECT work lights	-	12 V-18 V CAS battery
Price	<b>CHF 93,00</b>	<b>CHF 174,00</b>	<b>CHF 66,00</b>



NOVA 10 CONNECT 18V/14.4V/10V MAX 75W  
03.6102C  
IP -10° to +40°C  
SCANGRIP A/S  
RYTTERHAVEN 9  
DK-5700 SVENDBORG

CE  
RoHS  
REACH  
EU DESIGN PATENT NO. 212346  
21227 IP65 IK07

## WORK LITE series



	WORK LITE S	WORK LITE M
Product number	03.5667	03.5668
Light source	COB LED	COB LED Spot: High Power LED
LED performance, lumen/W	165	165
Luminous flux, lumen	25-250	35-350 Spot: 75
Illuminance, lux@0.5 m	30-300	40-400 Spot: 600
Adjustable light output	Stepless	Stepless
Beam angle	120°	120°/ 40°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	20	20
Charging time, h	3	3.5
Battery	3.7 V / 1500 mAh Li-ion	3.7 V / 2000 mAh Li-ion
Protection class	IP20 / IK07	IP20 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1A	5 V / 1A
Power consumption	Max 3 W	Max 4 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	120 x 54 x 24 mm	180 x 54 x 27 mm
Net weight	96 g	160 g
Price	<b>CHF 31,00</b>	<b>CHF 37,00</b>

## STICK LITE series



	STICK LITE S	STICK LITE M
Product number	03.5665	03.5666
Light source	COB LED	COB LED
LED performance, lumen/W	165	130
Luminous flux, lumen	20-200 Spot: 50	40-400 Spot: 75
Illuminance, lux@0.5 m	28-280 Spot: 380	50-500 Spot: 380
Adjustable light output	Stepless	Stepless
Beam angle	110°/ 35°	110°/ 35°
CRI	Ra > 80	Ra > 80
CCT	6000 K / 6000 K	6000 K / 6000 K
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	20	20
Charging time, h	2.5	3
Battery	3.7 V / 1200 mAh Li-ion	3.7 V / 1800 mAh Li-ion
Protection class	IP20 / IK07	IP20 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1A	5 V / 1A
Power consumption	Max 2.5 W	Max 4 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	150 x 34 x 13 mm	250 x 34 x 15 mm
Net weight	52 g	88 g
Price	<b>CHF 26,00</b>	<b>CHF 37,00</b>

## STAR LITE



	STAR LITE
Product number	03.5671
Light source	COB LED
LED performance, lumen/W	175
Luminous flux, lumen	400
Illuminance, lux@0.5 m	550
Adjustable light output	No
Beam angle	-
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	-
Operating time with min. lumen, h	-
Charging time, h	-
Battery	-
Protection class	IP40 / IK08
Impact resistance	1 m
Cable	5 m / 2 x 1.0 mm <sup>2</sup> H05RN-F
Operating voltage AC	100-240 V
Charging voltage/current DC	-
Power consumption	Max 4.5 W
Charger incl.	-
Temperature	-10 to +40 °C
Dimensions	340 x 40 x 25 mm
Net weight	600 g
Price	<b>CHF 37,00</b>

## HEAD LITE series



	HEAD LITE S	HEAD LITE A	HEAD LITE
Product number	03.5645	03.5670	03.5669
Light source	COB LED	COB LED	COB LED Spot: 1 SMD LED
LED performance, lumen/W	100	127	127
Luminous flux, lumen	14-140	15-150	15-150 Spot: 75
Illuminance, lux@0.5 m	20-200	25-250	25-250 Spot: 3000
Adjustable light output	Stepless	Stepless	Stepless
Beam angle	110°	120°/100°	120°/100° Spot: 15°
CRI	Ra > 65	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	1	6	1.5
Operating time with min. lumen, h	10	60	15
Charging time, h	-	-	3
Battery	Excl. (use 2 x AAA / 1.5 V Alkaline)	3 x AAA / 1.5 V Alkaline	3.7 V / 800 mAh Li-ion
Protection class	IP30	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m
Cable	-	-	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	-	-	5V / 1A
Power consumption	Max 1.5 W	Max 2 W	Max 2 W
Charger incl.	-	-	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	55 x 32.5 x 22 mm	70 x 35 x 40 mm	74 x 41 x 41 mm
Net weight	65 g	100 g	73 g
Price	<b>CHF 16,00</b>	<b>CHF 26,00</b>	<b>CHF 38,00</b>

## FLOOD LITE series



	FLOOD LITE S	FLOOD LITE M	FLOOD LITE MC
Product number	03.5660	03.5661	03.5662
Light source	COB LED	COB LED	COB LED
LED performance, lumen/W	170	170	170
Luminous flux, lumen	100-1000	200-2000	1750-3500
Illuminance, lux@0.5 m	140-1400	280-2800	2250-4500
Adjustable light output	Stepless	Stepless	2 levels
Beam angle	120°	120°	120°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	-
Operating time with min. lumen, h	20	20	-
Charging time, h	3.5	5	-
Battery	3.6 V / 5000 mAh Li-ion	7.2 V / 5000 mAh Li-ion	-
Protection class	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	5 m / 2 x 1.0 mm <sup>2</sup> H05RN-F
Operating voltage AC	-	-	100-240 V
Charging voltage/current DC	5 V / 2 A	5 V / 2 A	-
Power consumption	Max 10 W	Max 13 W	Max 30 W
Charger incl.	Yes	Yes	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	230 x 135 x 43 mm	275 x 163 x 47 mm	275 x 163 x 47 mm
Net weight	885 g	1.48 kg	1.91 kg
Price	<b>CHF 75,00</b>	<b>CHF 115,00</b>	<b>CHF 123,00</b>

## VEGA LITE series



AREA LITE  
360°



	VEGA LITE C+R	VEGA LITE COMPACT	VEGA LITE	AREA LITE CO
Product number	03.5451	03.5673	03.5453	03.5637
Light source	66 SMD LED	83 SMD LED	123 SMD LED	168 SMD LED
LED performance, lumen/W	189	189	189	189
Luminous flux, lumen	1250-2500	4000	6000	6000
Illuminance, lux@0.5 m	1900-3800	5500	8500	3000
Adjustable light output	2 levels	No	No	No
Beam angle	100°	100°	100°	360°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000K
Operating time with max. lumen, h	1.5	-	-	-
Operating time with min. lumen, h	3	-	-	-
Charging time, h	1.5	-	-	-
Battery	11.1 V / 2600 mAh Li-ion	-	-	-
Protection class	IP54 / IK07	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	-	-	-	1 m
Cable	5 m / 2 x 0.75 mm <sup>2</sup> H05RN-F	3 m / 3 x 1.5 mm <sup>2</sup> H05RN-F	5 m / 3 x 1.5 mm <sup>2</sup> H07RN-F	5 m / 3 x 1.5 mm <sup>2</sup> H07RN-F
Operating voltage AC	100-240 V	100-240 V	100-240 V	220-240 V
Charging voltage/current DC	12.6V / 2.4 A	-	-	-
Power consumption	Max 18 W	Max 32 W	Max 45 W	Max 45 W
Charger incl.	Yes	-	-	-
Temperature	-10° to +40°C	-10° to +40°C	-10° to +40°C	-10 to +30 °C
Dimensions	288 x 103 x 280 mm	288 x 103 x 280 mm	318 x 117 x 310 mm	305 x 199 mm
Net weight	2.59 kg	2.46 kg	3.43 kg	2.95 kg
Price	<b>CHF 150,00</b>	<b>CHF 150,00</b>	<b>CHF 173,00</b>	<b>CHF 173,00</b>

## FLASHLIGHT series



	MINI LITE A	PEN LITE A	POCKET LITE A	TORCH LITE 400 A	TORCH LITE 400
Product number	03.5102	03.5150	03.5151	03.5153	03.5154
Light source	LG	CREE XP-G2	CREE XP-G2	CREE	CREE
LED performance, lumen/W	158	142	142	165	165
Luminous flux, lumen	100	100	150	400	400
Illuminance, lux@0.5 m	8000	300-4000	400-6000	800-15000	800-15000
Adjustable light output	No	No	No	No	No
Beam angle	10°	10° - 60°	10° - 60°	10° - 60°	10° - 60°
Beam distance	Up to 80 m	Up to 60 m	Up to 70 m	Up to 120 m	Up to 120
CRI	Ra > 75	Ra > 70	Ra > 70	Ra > 65	Ra > 65
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	4.5	8	3.5	3	2.5
Operating time with min. lumen, h	-	-	-	-	-
Charging time, h	-	-	-	-	4
Battery	3 x AAA / 1.5V Alkaline	2 x AAA / 1.5V Alkaline	1 x AA / 1.5V Alkaline	2 x C / 1.5V Alkaline	3.7 V / 2600mAh Li-ion
Protection class	IP54	IP54 / IK07	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	-	-	-	-	1 m USB
Operating voltage AC	-	-	-	-	-
Charging voltage/current DC	-	-	-	-	5 V / 1 A
Power consumption	Max 2 W	Max 1.5 W	Max 1.5 W	Max 5.1 W	Max 4.5 W
Charger incl.	-	-	-	-	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø28 x 102 mm	ø19 x 152 mm	ø20 x 110 mm	ø32 x 179 mm	ø29 x 163 mm
Net weight	72 g	55 g	65 g	280 g	182 g
Price	<b>CHF 10,00</b>	<b>CHF 26,00</b>	<b>CHF 26,00</b>	<b>CHF 44,00</b>	<b>CHF 57,00</b>

SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard



## Penlights



## Headlamp



	MATCH PEN	MATCH PEN R
Product number	03.5117	03.5122
Light source	Ultra high CRI LED	Ultra high CRI LED
Luminous flux, lumen	100	100
Illuminance, lux@0.5 m	300-4000	700-8000
Adjustable light output	No	No
Beam angle	10°-70°	10°-45°
Beam distance	Up to 75 m	Up to 95 m
CRI	Ra > 95	Ra > 92
CCT	4500 K	4500-6500 K
Adjustable CCT	-	2 steps
Operating time with max. lumen, h	2	2.5
Operating time with min. lumen, h	-	-
Charging time, h	-	2.5
Battery	2 x AAA / 1.5 V Alkaline	3.7 V / 1100 mAh Li-ion
Protection class	IP54	IP30
Impact resistance	1 m	1 m
Cable	-	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	5 V / 1 A
Power consumption	3 W	Max 2.5 W
Charger incl.	-	Yes
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø16 x 148 mm	ø19 x 159 mm
Net weight	60 g	88 g
Price	<b>CHF 52,00</b>	<b>CHF 66,00</b>

	I-MATCH 3
Product number	03.5656
Light source	Ultra high <b>CRI+</b> COB LED
Luminous flux, lumen	25-250
Illuminance, lux@0.5 m	60-600
Adjustable light output	Stepless
Beam angle	120°-60°
Beam distance	-
CRI	Ra > 96 <b>CRI+</b>
CCT	4500-6500 K
Adjustable CCT	5 steps
Operating time with max. lumen, h	1.5
Operating time with min. lumen, h	15
Charging time, h	3.5
Battery	3.8 V / 1600 mAh Li-poly
Protection class	IP65 / IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 2.5 W
Charger incl.	No
Temperature	-10 to +40 °C
Dimensions	100 x 38 x 50 mm
Net weight	100 g
Price	<b>CHF 102,00</b>

SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard

## Handlamps



### Kit in bag

	MINIMATCH	SUNMATCH 4
Product number	03.5650	03.5657
Light source	Ultra high <b>CRI+</b> COB LED	Ultra high <b>CRI+</b> COB LED
Luminous flux, lumen	100-200	50-500 Spot: 200
Illuminance, lux@0.5 m	250-500	700-1400 Spot: 5000
Adjustable light output	2 levels	Stepless
Beam angle	75°	80° Spot: 20°
CRI	Ra > 96 <b>CRI+</b>	Ra > 96 <b>CRI+</b> Spot: 95
CCT	4500-6500 K	2500-6500 K Spot: 4000 K
Adjustable CCT	2 steps	Stepless
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	4	10
Charging time, h	4	4
Battery	3.7 V / 1600 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 3.5 W	Max 8 W
Charger incl.	Yes	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	156 x 60 x 38 mm	188 x 58 x 26 mm
Net weight	190 g	267 g
Price	<b>CHF 114,00</b>	<b>CHF 168,00</b>

	ESSENTIAL	ULTIMATE
Product number	49.0220	49.0217
Content	I-MATCH 3 MINIMATCH MULTIMATCH R	MATCHPEN R I-MATCH 3 SUNMATCH 4 MULTIMATCH 3 incl. battery/charger
Dimensions	290 x 100 x 190 mm	385 x 115 x 300 mm
Net weight	1.755 kg	4.464 kg
Price	<b>CHF 384,00</b>	<b>CHF 642,00</b>

ACCESSORY	Product number	Price
<p>SCANGRIP DIFFUSER - Small - 4 pcs For MINIMATCH and SUNMATCH 3</p>	03.5778	<b>CHF 19,00</b>



Go to page 30 to see other diffusers, suspensions and accessories



MULTIMATCH series



	MULTIMATCH R	MULTIMATCH 3	MULTIMATCH 8
Product number	03.5658	03.5653	03.5654
Light source	Ultra high CRI+ COB LED	Ultra high CRI+ COB LED	Ultra high CRI+ COB LED
Luminous flux, lumen	120-1200	300-3000	800-8000
Illuminance, lux@0.5 m	250-2500	450-4500	1200-12000
Adjustable light output	Stepless	5 levels	5 levels
Beam angle	100°	115°	115°
CRI	Ra > 96 CRI+	Ra > 96 CRI+	Ra > 96 CRI+
CCT	2500-6500 K	2500-6500 K	2500K-6500 K
Adjustable CCT	Stepless	5 steps	5 steps
Operating time with max. lumen, h	0.8	1.5	1
Operating time with min. lumen, h	10	15	10
Charging time, h	3.5	1.5*	1.5*
Battery	3.7 V / 5400 mAh Li-ion	11.1 V / 4000 mAh Li-ion	11.1 V / 8000 mAh Li-ion
Protection class	IP67 / IK07	IP67 / IK07	IP67 / IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
Charging voltage/current DC	5 V / 2 A	12.6 V / 2.8 A	12.6 V / 6.8 A
Power consumption	Max 16.5 W	Max 30 W	Max 85 W
Battery incl.	-	SPS BATTERY 4 Ah 03.6003	SPS BATTERY 8 Ah 03.6004
Charger incl.	Yes	SPS CHARGING SYSTEM 35 W 03.6006	SPS CHARGING SYSTEM 85 W 03.6008
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	155 x 165 x 64 mm	240 x 230 x 104 mm	305 x 290 x 125 mm
Net weight	820 g	1.97 kg	3.6 kg
Price	<b>CHF 162,00</b>	<b>CHF 348,00</b>	<b>CHF 516,00</b>



SEE VIDEO WITH  
DETAILING AND  
COLOUR MATCH  
PRODUCTS

\*80%

SCANGRIP POWER SOLUTION accessories



	SPS BATTERY 4Ah	SPS BATTERY 8Ah	SPS CHARGING SYSTEM 35W	SPS CHARGING SYSTEM 85W
Product number	03.6003	03.6004	03.6006	03.6008
Battery	11.1V / 4000 mAh Li-ion	11.1V / 8000 mAh Li-ion	-	-
Charging voltage/current DC	12.6 V / 2.8 A	12.6 V / 6.8 A	12.6 V / 2.8 A	12.6 V / 6.8 A
Cable	-	-	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
Charger input voltage	-	-	100-240 V AC 50/60 Hz	100-240 V AC 50/60 Hz
Power consumption	-	-	Max 35 W	Max 85 W
Charging time, h	1.5*	1.5*	-	-
Protection class	IP67 / IK07	IP67 / IK07	IP67 / IK07	IP67 / IK07
Impact resistance	1 m	1 m	1 m	1 m
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	103 x 75 x 40 mm	103 x 75 x 62 mm	139 x 75 x 40 mm	139 x 75 x 49 mm
Net weight	320 g	560 g	650 g	760 g
Price	<b>CHF 50,00</b>	<b>CHF 87,00</b>	<b>CHF 50,00</b>	<b>CHF 87,00</b>

\*80%



## Handlamps

ZONE  
2/22ZONE  
0/20

## Headlamp

ZONE  
2/22

	MIDI-EX	UNI-EX
Product number	03.5611	03.5617
Light source	COB-LED Spot: SMD LED	COB-LED Spot: SMD LED
Luminous flux, lumen	100-200 Spot: 100	175-350 Spot: 150
Illuminance, lux@0.5 m	140-280 Spot: 600	250-500 Spot: 1200
Adjustable light output	2 levels	2 levels
Beam angle	105° Spot: 60°	100° Spot: 30°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time, h	Up to 5 Spot: 2	Up to 15 Spot: 9
Charging time, h	3.5	12
Battery	3.8 V / 1600 mAh Li-ion	3.6 V / 6700 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	2 and 22	0 and 20
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	-
Power consumption	Max 3 W	Max 3.5 W
Charger incl.	Yes	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	181.8 x 46 x 29 mm	220 x 70 x 39 mm
Net weight	181 g	436 g
Price	<b>CHF 126,00</b>	<b>CHF 324,00</b>

	EX-VIEW
Product number	03.5606
Light source	COB-LED Spot: SMD LED
Luminous flux, lumen	200 Spot: 100
Illuminance, lux@0.5 m	300 Spot: 1000
Adjustable light output	No
Beam angle	100° Spot: 35°
CRI	Ra > 80
CCT	6000 K
Operating time, h	Up to 2.5 Spot: 3.5
Charging time, h	3.5
Battery	3.8 V / 1600 mAh Li-ion
Protection class	IP65
Impact resistance	1 m
EX ZONE	2 and 22
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	-
Power consumption	Max 1.6 W
Charger incl.	Yes
Temperature	-20 to +45 °C
Dimensions	95 x 55 x 43 mm
Net weight	142 g
Price	<b>CHF 126,00</b>

SEE VIDEO WITH  
THE EX PROOF  
PRODUCTS

## NOVA-EX series

ZONE  
1/21ZONE  
1/21

	NOVA-EX	NOVA-EX R
Product number	03.5619	03.5618
Light source	High CRI COB LED	High CRI COB LED
Luminous flux, lumen	1700-3400	2000-4000
Illuminance, lux@0.5 m	2900-5800	3000-6000
Adjustable light output	2 levels	2 levels
Beam angle	110°	100°
CRI	Ra > 95	Ra > 95
CCT	6000 K	6000 K
Operating time, h	-	Up to 4 h
Charging time, h	-	3
Battery	-	21.6 V / 3350 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	1 and 21	1 and 21
Cable	10 m / 3 x 1 mm <sup>2</sup> H05RN-F	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
Operating voltage AC	100-240V 50/60 Hz	-
Charging voltage/current DC	-	21.6V / 1A
Power consumption	35 W	31W
Charger incl.	-	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	270 x 266 x 123 mm	270 x 261 x 130 mm
Net weight	5.3 kg	4.3 kg
Price	<b>CHF 528,00</b>	<b>CHF 840,00</b>

ACCESSORIES	Product number	Price
 ZONE 1/21 MAGNETIC BRACKET EX For flexible positioning on any magnetic surface.	03.5616	<b>CHF 72,00</b>
 ZONE 1/21 SCAFFOLDING BRACKET EX Designed to fix NOVA-EX work lights on scaffolding or any round object ø40-50 mm.	03.5609	<b>CHF 48,00</b>
 ZONE 1/21 TRIPOD EX 1.35 - 3 m.	03.5607	<b>CHF 168,00</b>

SCANGRIP accessories are approved to be used in explosive atmosphere, zone 1 and 21, in combination with NOVA-EX and NOVA-EX R



## UV CURING series



	UV-PEN	UV-LIGHT	NOVA-UV S	UV-GUN
Product number	03.5800	03.5801	03.5802	03.5803
Light source	UV LED	UV LED	UV LED	UV LED
Irradiance	At 3 cm distance Curing diameter: ø5 cm Min. irradiance: 18mW/cm <sup>2</sup> Center irradiance: 42 mW/cm <sup>2</sup>	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: 6 mW/cm <sup>2</sup> Center irradiance: 16 mW/cm <sup>2</sup>	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: >35 mW/cm <sup>2</sup> Center irradiance: 70 mW/cm <sup>2</sup>  At 16 cm distance Curing diameter: ø25 cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 12 mW/cm <sup>2</sup>	At 10 cm distance Curing diameter: ø18 cm Min. irradiance: >68 mW/cm <sup>2</sup> Center irradiance: 340 mW/cm <sup>2</sup>  At 56cm distance Curing diameter: ø68cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 14 mW/cm <sup>2</sup>
Curing area	20 cm <sup>2</sup>	75 cm <sup>2</sup>	75 cm <sup>2</sup> at 6 cm distance 490 cm <sup>2</sup> at 16 cm distance	250 cm <sup>2</sup> at 10 cm distance 3600 cm <sup>2</sup> at 56 cm distance
Wavelength	390-400 nm	390-400 nm	395-400 nm	395-400 nm
Operating time with max. lumen	1	1.5	1.5	40 min
Operating time with min. lumen	-	-	-	-
Charging time, h	4	4	3.5	2*
Battery	3.7 V / 1100 mAh	3.7 V / 2600 mAh	3.7 V / 5400 mAh	11.1 V / 8000 mAh
Protection class	IP30	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07	IK06
Impact resistance	1 m	1 m	1 m	1m
Cable	1 m USB	1 m USB	1 m USB	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 2 A	12.6 V / 4 A
Power consumption	3 W	3 W	12 W	120 W
Battery incl.				SPS BATTERY 03.6004
Charger incl.	No	No	Yes	SPS CHARGING SYSTEM 50 W 03.6007
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø19 x 159 mm	190 x 60 x 32 mm	163 x 63 x 163 mm	215 x 96 x 300 mm
Net weight	88 g	270 g	705 g	1.89 kg incl. battery
Price	<b>CHF 129,00</b>	<b>CHF 207,00</b>	<b>CHF 502,00</b>	<b>CHF 1.529,00</b>

\* 80%

## SCANGRIP POWER SOLUTION accessories



SPS BATTERY 8Ah	SPS CHARGING SYSTEM 50W
03.6004	03.6007
11.1 V / 8000 mAh Li-ion	-
12.6 V / 6.8 A	12.6 V / 4 A
-	5 m / 2 x 0,75 mm <sup>2</sup> H05RN-F
-	100-240 V AC 50/60 Hz
-	Max 50 W
1.5*	-
IP67 / IK07	IP67 / IK07
1 m	1 m
-10 to +40 °C	-10 to +40 °C
103 x 75 x 62 mm	139 x 75 x 49 mm
560 g	700 g
<b>CHF 87,00</b>	<b>CHF 62,00</b>

UV-PEN

UV-LIGHT

NOVA-UV S

UV-GUN

ø5 cm


ø10 cm

ø25 cm

ø68 cm

SEE VIDEO WITH THE UV CURING PRODUCTS



ACCESSORY		Product number	Price
	UV PROTECTION GLASSES Verified protection against the complete UV spectrum up to 400 nm.	03.5759	<b>CHF 27,00</b>

UV CURING series




	UV-EXTREME	UV-EXTREME PLUS
Product number	03.5272	03.5273
Light source	UV LED	UV LED
Irradiance	At 60 cm distance Curing diameter: ø 95 cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 16 mW/cm <sup>2</sup>	At 80 cm distance Curing size: 135x130 cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 18 mW/cm <sup>2</sup>
	At 40 cm distance Curing diameter: ø 90 cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 35 mW/cm <sup>2</sup>	At 40 cm distance Curing size: 110x100 cm Min. irradiance: >6 mW/cm <sup>2</sup> Center irradiance: 68 mW/cm <sup>2</sup>
	At 10 cm distance Curing diameter: ø 22 cm Min. irradiance: >80 mW/cm <sup>2</sup> Center irradiance: 398 mW/cm <sup>2</sup>	At 10 cm distance Curing size: 34x24 cm Min. irradiance: >120mW/cm <sup>2</sup> Center irradiance: 490mW/cm <sup>2</sup>
Curing area	7000 cm <sup>2</sup> at 60 cm distance 6300 cm <sup>2</sup> at 40 cm distance 380 cm <sup>2</sup> at 10 cm distance	13000cm <sup>2</sup> at 80 cm distance 8600cm <sup>2</sup> at 40 cm distance 640cm <sup>2</sup> at 10 cm distance
Wavelength	395-400nm	395-400nm
Protection class	IP30	IP30
Impact protection	IK08	IK08
Impact resistance	1 m	1m
Cable	5 m / 2x1.0 mm <sup>2</sup> H05RN-F	5 m / 2x1.0 mm <sup>2</sup> H05RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	300 W	600 W
Temperature	-10° to +40°C	-10° to +40°C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	<b>CHF 2.400,00</b>	<b>CHF 3.600,00</b>

RISK GROUP 3

Verified UV protection face visor is included



ACCESSORY	Product number	Price
 MOUNTING BRACKET FOR UV-EXTREME and UV-EXTREME PLUS on 03.5682 WHEEL STAND	03.5915	<b>CHF 58,00</b>

## COMPATIBILITY

SCANGRIP specialized LED work lights for UV CURING has been tested and proven successfully on leading brands of UV-cured products.



Scan the QR code



03.5682 WHEEL STAND









## SCANGRIP Accessories

To give you maximum flexibility, we have made a complete concept of accessories that allow you to place the lamps exactly where you need it wherever you are.

Product description	Function	Compatibility	Product number	Price
 SCANGRIP DIFFUSER MEDIUM Diffuses and softens the light		NOVA R MULTIMATCH R NOVA 2 CONNECT	03.5922	<b>CHF 11,00</b>
 SCANGRIP DIFFUSER Provides a large dispersion and spreads the light		MULTIMATCH 3 NOVA 4K, 4K C+R NOVA 4 CONNECT	03.5750	<b>CHF 13,00</b>
 SCANGRIP DIFFUSER - Large Provides a large dispersion and spreads the light		MULTIMATCH 8 NOVA 6K, 6K C+R, 12K NOVA 10 CONNECT	03.5751	<b>CHF 19,00</b>
 SCAFFOLDING BRACKET For flexible positioning on scaffolds or any round object ø40-50 mm		FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT	03.5341	<b>CHF 37,00</b>
 MAGNET BRACKET For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3 NOVA 4K, 4K C+R NOVA 4 CONNECT	03.5390	<b>CHF 37,00</b>
 MAGNET BRACKET - Large For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3, 8 NOVA 6K, 6K C+R, 12K, 4K, 4K C+R NOVA 4, 10 CONNECT	03.5391	<b>CHF 64,00</b>
 C+R CAR ADAPTER For easy charging on the go with DUAL SYSTEM 2 in 1 products		LINE LIGHT BONNET C+R LINE LIGHT C+R NOVA 4K C+R, 6K C+R VEGA LITE C+R	03.5342	<b>CHF 37,00</b>
 USB CAR CHARGER Easy charging from the cigarette socket when on the move		Fits all SCANGRIP lighting products with USB compatibility. 5 V, 12-24 V	03.5301	<b>CHF 12,00</b>



SEE VIDEO  
360° ACCESSORIES  
FOR MAXIMUM  
FLEXIBILITY

Product description	Function	Compatibility	Product number	Price
 <p>SCANGRIP TRIPOD 2M 0.78 - 2 m</p>		<p>AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT DUO CONNECT</p>	03.5685	<b>CHF 98,00</b>
 <p>SCANGRIP TRIPOD 3M 1.35 - 3 m</p>		<p>AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA LITE, C+R, COMPACT SITE LIGHT 30, 60 UV-EXTREME UV-EXTREME PLUS</p>	03.5431	<b>CHF 138,00</b>
 <p>SCANGRIP WHEEL STAND 0.9 - 1.9 m</p>		<p>AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT UV-EXTREME UV-EXTREME PLUS</p>	03.5682	<b>CHF 173,00</b>
 <p>DUAL BRACKET Dual bracket for positioning of two lamps on TRIPOD 3M and WHEEL STAND</p>		<p>FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA UV-S STAR VEGA LITE, C+R, COMPACT</p>	03.5308	<b>CHF 31,00</b>

## Technical terms and details in 11 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in a range of languages.



UK	DE	FR	IT
Product number	Artikelnummer	Référence	Codice prodotto
Light source	Lichtquelle	Source lumineuse	Sorgente luminosa
LED performance, lumen/W	LED-Lichtausbeute, Lumen/W	LED performance, lumens/W	Prestazioni LED, lumen/W
Luminous flux, lumen	Lichtstrom, Lumen	Lumens	Flusso luminoso, lumen
Illuminance, lux@0.5 m	Lichtstärke, Lux@0,5 m	Lux à 0,5 m	Illuminamento, lux@0.5 m
Adjustable light output	Einstellbare Lichtausbeute	Réglage de la puissance	Rendimento luminoso regolabile
Beam angle	Abstrahlwinkel	Angle faisceau	Angolo del fascio
Beam distance	Leuchtwerte	Distance faisceau	Distanza fascio
Irradiance	Bestrahlungsstärke	Irradiance	Irraggiamento
Curing area	Härtefläche	Zone de durcissement	Superficie di essiccazione
Wavelength	Wellenlänge	Longueur d'onde	Lunghezza d'onda
CRI	Farbwiedergabeindex	IRC	CRI
CCT	Farbtemperatur	TCP	CCT
Operating time with max. lumen, h	Betriebsdauer mit max. Lumen, Std.	Autonomie avec lumens maxi. (h)	Ore auton. a max. potenza lumen
Operating time with min. lumen, h	Betriebsdauer mit min. Lumen, Std.	Autonomie avec lumens mini. (h)	Ore auton. a min. potenza lumen
Operating time: backup battery, h	Betriebsdauer: Reserveakku, Std.	Autonomie batterie de secours, (h)	Autonomia: batteria tampone, h
Charging time, h	Ladedauer, Std.	Temps de charge (h)	Tempo di ricarica, h
Battery	Akku	Batterie	Batteria
Protection class	IP-Schutzart	Étanchéité	Classe di protezione
Impact protection	Stoßfestigkeitsgrad	Protection contre les chocs	Protezione contro gli urti
Impact resistance	Stoßfestigkeit	Résistance aux chocs	Resistenza alle cadute
Operating voltage AC	Nennspannung AC	Tension d'alimentation	Tensione di esercizio AC
Charging voltage /current DC	Ladespannung/Ladestrom DC	Tension de charge	Tensione di ricarica / corrente continua
Cable	Kabel	Câble	Cavo
Charger input voltage	Eingangsspannung	Tension d'alimentation	Tensione del caricabatterie
Output power / Max. load	Ausgangsleistung	Consommation	Potenza di uscita
Power consumption	Leistungsaufnahme	Consommation électrique	Consumo di corrente
Battery incl.	Einschl. Akku	Batterie incluse	Batteria incl.
Charger incl.	Mit Ladegerät	Chargeur inclus	Caricabatterie incl.
SCANGRIP power supply incl.	SCANGRIP Stromversorgung einschl.	Alimentation SCANGRIP incluse	Alimentatore SCANGRIP incl.
Temperature	Temperatur	Température d'utilisation	Temperatura
Dimensions	Abmessungen	Dimensions	Dimensioni
Net weight	Nettogewicht	Poids net	Peso netto
Price	Preis	Prix	Prezzo



PT	ES	SE	DK
Número do artigo	Referencia de producto	Artikelnummer	Produktnummer
Fonte de luz	Fuente de luz	Ljuskälla	Lyskilde
Performance LED, lúmen/W	Rendimiento LED, lumen/W	LED-prestanda, lumen/W	LED virkningsgrad, lumen/W
Fluxo luminoso, lúmen	Flujo luminoso, lumen	Ljusflöde, lumen	Lysström, lumen
Iluminação, lux@0,5 m	Iluminación lux@0.5 m	Illuminans, lux@0,5 m	Belysningsstyrke, lux@0,5 m
Intensidade de luz ajustável	Intensidad de luz ajustable	Justerbart ljusflöde	Justerbart lysudbytte
Ângulo de luz	Ângulo de luz	Strålvinkel	Lysvinkel
Distância do feixe	Distancia del haz	Strålavstånd	Lyskeglælængde
Irradiação	Irradición	Irradians	Bestrålingsstyrke
Área de secagem	Área de secado	Härdningsarea	Hærdeområde
Comprimento de onda	Longitud de onda	Våglängd	Bølgelængde
CRI	IRC	CRI	Farvegengivelse
CCT	CCT	CCT	Farvetemperatur
Tempo de funcionamento com máx. lumens, h	Autonomía a máxima potencia (h.)	Driftstid med max. lumen, timmar	Driftstid med max. lumen
Tempo de funcionamento com mín. lumens, h	Autonomía a mínima potencia (h.)	Driftstid med min. lumen, timmar	Driftstid med min. lumen
Tempo de funcionamento com bateria interna, h	Autonomía con batería interna (h.)	Driftstid: reservbatteri, timmar	Driftstid backup batteri
Tempo de carregamento, h	Tiempo de carga (h.)	Laddningstid, timmar	Ladetid
Bateria	Batería	Batteri	Batteri
Classe de proteção	Clase de protección	Skyddsklass	IP-klasse
Proteção contra impacto	Protección contra impactos	Slagskydd	IK-klassifikation
Resistência a impactos	Resistencia al impacto	Stöttålighet	Faldtest
Tensão operacional AC	Tensión de funcionamiento CA	Driftspänning AC	Driftsspænding AC
Tensão de carregamento/ corrente DC	Tensión/corriente DC de carga	Laddningsspänning/befintlig DC	Ladespænding DC
Cabo	Cable	Kabel	Kabel
Tensão de entrada do carregador	Voltaje de entrada cargador	Inspänning, laddare	Lader, indgangsspænding
Potência de saída	Potencia de salida	Uteffekt	Udgangseffekt
Cosumo de energia	Consumo energía	Energiförbrukning	Effektforbrug
Bateria incl.	Batería incl.	Inkl. batteri	Inkl. batteri
Carregador incl.	Cargador incl.	Inkl. laddare	Inkl. lader
Fonte de energia incluída	SCANGRIP Power Supply incl.	Inkl. SCANGRIP strömförsörjning	Inkl. SCANGRIP strømforsyning
Temperatura	Temperatura	Temperatur	Driftstemperatur
Dimensões	Dimensiones	Mått	Dimensioner
Peso líquido	Peso neto	Nettovikt	Nettovægt
Preço	Precio	Pris	Pris

## Technical terms and details in 11 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in 11 languages.

UK	NL	PL	CZ
Product number	Productnummer	Numer produktu	Číslo výrobku
Light source	Lichtbron	Źródło światła	Zdroj světla
 LED performance, lumen/W	LED-prestaties, lumen/W	Wydajność LED, lumen/W	Výkon LED, lumen/W
Luminous flux, lumen	Lichtstroom, lumen	Strumień świetlny, lumen	Světelný tok, lumen
Illuminance, lux@0.5 m	Verlichting, lux@0,5 m	Natężenie oświetlenia, luksy z 0,5 m	Osvětlení, lux ve vzdálenosti 0,5 m
Adjustable light output	Aanpasbare lichtopbrengst	Regulowana moc świetlna	Nastavitelný světelný výkon
Beam angle	Stralingshoek	Kąt wiązki	Úhel paprsku
Beam distance	Stralingsafstand	Zasięg wiązki	Vzdálenost paprsku
Irradiance	Bestraling	Natężenie promieniowania	Ozáření
Curing area	Uithardingsgebied	Obszar utwardzania	Vytvrzovací plocha
Wavelength	Golflengte	Długość fali	Vlnová délka
CRI	CRI	CRI	Index podání barev, CRI
CCT	CCT	CCT	Náhradní teplota chromatičnosti, CCT
Operating time with max. lumen, h	Bedrijfstijd met max. lumen, u	Czas pracy przy maks. natężeniu światła, w godz.	Provozní doba s max. lumenů, h
Operating time with min. lumen, h	Bedrijfstijd met min. lumen, u	Czas pracy przy min. natężeniu światła, w godz.	Provozní doba s min. lumenů, h
Operating time: backup battery, h	Bedrijfstijd: back-upaccu, u	Czas pracy: akumulator awaryjny, w godz.	Provozní doba: záložní baterie, h
Charging time, h	Oplaadtijd, u	Czas ładowania, w godz.	Doba nabíjení, h
Battery	Accu	Akumulator	Baterie
Protection class	Beschermingsklasse	Stopień ochrony	Třída ochrany
Impact protection	Stootbeveiliging	Ochrona przed uderzeniami	Ochrana při nárazu
Impact resistance	Stootweerstand	Odporność na uderzenia	Odolnost proti nárazu
Operating voltage AC	Bedrijfsspanning AC	Napięcie robocze AC	Provozní napětí AC
Charging voltage /current DC	Laadspanning/-stroom DC	Napięcie/prąd ładowania DC	Nabíjecí napětí/proud DC
Cable	Kabel	Kabel	Kabel
Charger input voltage	Ingangsspanning lader	Napięcie wejściowe ładowarki	Vstupní napětí nabíječky
Output power / Max. load	Uitgangsvermogen	Moc wyjściowa	Výstupní výkon
Power consumption	Energieverbruik	Zužycie energii	Příkon
Battery incl.	Accu inbegrepen	Bateria w zestawie	Včetně baterie
Charger incl.	Lader inbegrepen	Ładowarka w zestawie	Včetně nabíječky
SCANGRIP power supply incl.	SCANGRIP-voeding inbegrepen	Zasilacz SCANGRIP w zestawie	Včetně napájecího zdroje SCANGRIP
Temperature	Temperatuur	Temperatura	Teplota
Dimensions	Afmetingen	Wymiary	Rozměry
Net weight	Netto gewicht	Masa netto	Čistá hmotnost
Price	Prijs	Cena	Cena





// SCANGRIP ist Europas führender Hersteller von Arbeitsleuchten für den professionellen Einsatz und bietet das leistungsfähigste und umfassendste Kompletprogramm an Arbeitsleuchten mit der modernsten LED-Technologie des Markts.

SCANGRIP ist Innovation aus Dänemark: und genießt höchste Anerkennung im Markt für das exklusive Design, und die Produkte sind für ihre bewährte Qualität weltweit bekannt.

SCANGRIP strebt nach Perfektion und optimiert und verbessert ständig die Lichtausbeute, Akkukapazität, das Design und die Ergonomie sowie die Lebensdauer, Benutzerfreundlichkeit und Funktionalität der Produkte. Das Ziel sind ganz neue Maßstäbe für Profi-Arbeitsbeleuchtung zu setzen.

SCANGRIP wurde im Jahr 1906 gegründet und blickt auf eine lange, beeindruckende Geschichte in der Herstellung hochwertiger Handwerkzeuge und Arbeitsleuchten für die Industrie, das Baugewerbe und die Automobilindustrie zurück.

SCANGRIP ist Teil der Hultafors Group – eines globalen Unternehmens, das ein einmaliges Portfolio an Premium-Marken für persönliche Schutzausrüstung, Handwerkzeuge und andere Ausrüstungen für anspruchsvolle Handwerker anbietet. Gemeinsam sind wir bestrebt, den Tag für professionelle Anwender besser zu gestalten.

// SCANGRIP est le premier fabricant européen de lampes de travail pour les professionnels. Nos gammes sont les plus performantes et les plus complètes avec la dernière technologie d'éclairage LED disponible sur le marché.

SCANGRIP est une innovation danoise et bénéficie d'une forte notoriété sur le marché pour la conception de ses produits, qui sont connus pour leur grande qualité et robustesse.

SCANGRIP vise la perfection et optimise et améliore en permanence le rendement lumineux, la capacité des batteries, le design et l'ergonomie, la durabilité, la facilité d'utilisation et les fonctionnalités. L'objectif est d'établir de nouvelles références pour les lampes de travail professionnelles.

SCANGRIP a été créé en 1906 et a une longue et impressionnante expérience dans la fabrication d'outils à main et de lampes de travail de grande qualité pour les secteurs de l'industrie, de la construction et de l'automobile.

SCANGRIP fait partie du Groupe Hultafors - un groupe mondial qui propose un portefeuille unique de marques haut de gamme dans le domaine de la protection individuelle, de l'outillage et des équipements pour le travail en hauteur. Ensemble, nous avons pour mission de créer un quotidien meilleur pour les utilisateurs professionnels.

Alle Preise sind Dauertiefpreise in CHF, exkl. MwSt., inkl. vRG.

Tous les prix sont des prix bas permanents en CHF, hors TVA, TAR incluse.

Ihr Fachhändler:  
Votre revendeur:



**Fux Elektrowerkzeuge GmbH**

Dorfstrasse 20b • 4444 Rümlingen

Telefon: 062 791 44 44

Natel: 079 247 44 44

Fax: 062 299 26 74

**info@fuxtools.ch • www.fuxtools.ch**